


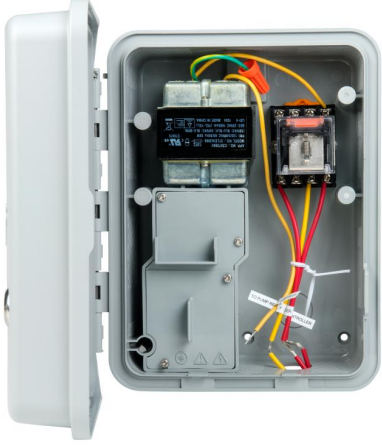

PSR-B

ءارضال اءاطسمل ار :ءرااءال ءمالءال

مءءال اءول :ءاءءنملا طء

ءءضملا لءءشء لءم :ءءنملا زارط

PSRB :نوزملا اب طافءءال ءءو

ءءو ءء ءءاء زءءء ف مءءسء ءءءملا لءءشء ءء لءم زءم :فصول
رمال مزل اءل ءءك ءءضم لءءشء ءء لءم لءءشء لءمءءال

Shipping Information

UPC-A: 0611698146071

ءءءءءال/ءءمءال : 8

ءءءءءءءءءء : 1664

ءءءءءءءءءء : 1280

ءءءءءءءءءءءء : 8

Pump Start Relay Electrical Specifications									
Models	Single Phase		3 Phase	Max. Full Load Amps	Max. Resistive Amps	Coil VA		Coil VA	
	kW at 120 VAC	kW at 230 VAC	kW at 230 VAC			Inrush	(Amps)	Holding	(Amps)
PSR-22	1.5*	2.2*	N/A	30	40	33	(1.38)	8	(0.33)
PSR-52	2.2	5.6	N/A	40	50	65	(2.71)	7.5	(0.31)
PSR-53	2.2	5.6	7.5	40	50	65	(2.71)	7.5	(0.31)
Note: *Approximate power									

Copyright © 2026 Hunter Industries Inc. Hunter, the Hunter logo, and other marks are trademarks of Hunter Industries Inc., registered in the U.S. and certain other countries.

<https://api.hunterirrigation.com/ar/node/426216>
020326