


IBV

Built of solid brass, this valve can power through the fiercest irrigation conditions.

KEY BENEFITS

- Factory-installed Filter Sentry® scours the filter screen in dirty water conditions
- External/internal manual bleed allows for quick and easy activation at the valve
- Heavy-duty brass construction provides high pressure rating and reliability
- Double-beaded diaphragm seal design ensures leak-free performance
- Fabric-reinforced EPDM diaphragm and seat ensure greater performance in all water conditions
- Triple-tool bonnet screws are compatible with standard or Phillips screwdrivers as well as a nut driver
- Encapsulated solenoid with captive plunger used on every Hunter valve provides hassle-free service
- Flow control maximizes efficiency and prolongs the life of the system

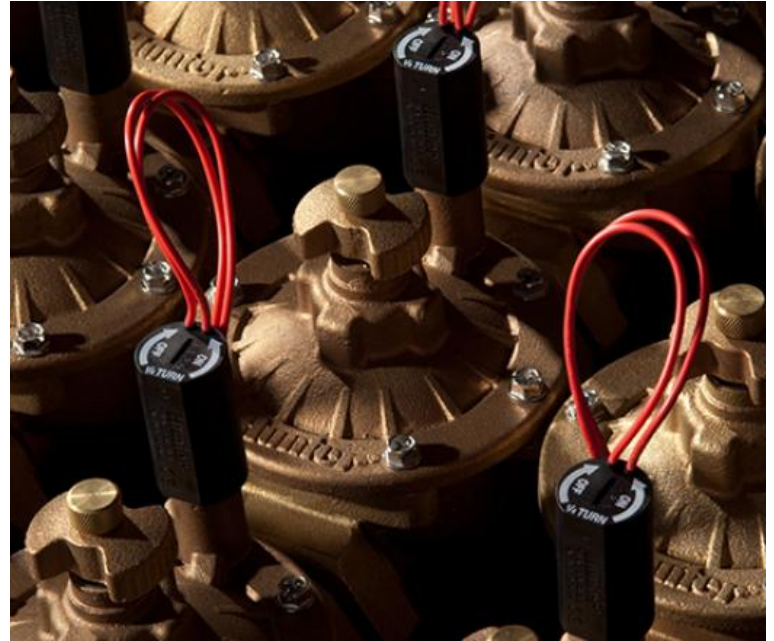

Operating Specifications

- Flow rate:
 - IBV-101G-FS: 0.1 to 40 GPM
 - IBV-151G-FS: 0.1 to 150 GPM
 - IBV-201G-FS: 0.1 to 200 GPM
 - IBV-301G-FS: 0.1 to 300 GPM
- Recommended pressure range: 20 to 220 PSI
- Temperature rating: 150°F
- Warranty period: 5 years

IBV Pressure Loss

IBV Pressure Loss in PSI				
Flow	1"	1½"	2"	3"
GPM	Globe	Globe	Globe	Globe
0.1	2.0			
0.5	2.0			
1	2.0			
5	2.5			
10	3.0			
15	3.0			
20	3.0	1.5		

IBV Pressure Loss in PSI				
30	4.0	1.5		
40	7.0	1.7	0.8	
50		2.2	1.2	
60		3.0	1.7	
75		3.9	2.4	
90		5.5	3.2	
100		7.0	4.2	
120		10.9	6.5	
135		12.7	7.9	
150		16.2	9.8	2.5
175			13.3	3.0
200			17.7	4.1
225				5.3
250				6.7
275				8.3
300				10.1

Solenoid Specifications

- 24 VAC solenoid
- 350 mA inrush, 190 mA holding, 60 HZ
- 370 mA inrush, 210 mA holding, 50 HZ

Factory Installed Options

- DC: DC-latching solenoid for battery-powered controllers

User Installed Options

- Accu Sync® pressure regulation at the valve
- DC-latching solenoid for battery-powered controllers (P/N 458200)
- Solenoid conduit cover (P/N 464322)

IBV PRESSURE LOSS IN PSI

Flow GPM	1" Globe	1½" Globe	2" Globe	3" Globe
0.1	2.0			
0.5	2.0			
1	2.0			
5	2.5			
10	3.0			
15	3.0			
20	3.0	1.5		
30	4.0	1.5		
40	7.0	1.7	0.8	
50		2.2	1.2	
60		3.0	1.7	
75		3.9	2.4	
90		5.5	3.2	
100		7.0	4.2	
120		10.9	6.5	
135		12.7	7.9	
150		16.2	9.8	2.5
175			13.3	3.0
200			17.7	4.1
225				5.3
250				6.7
275				8.3
300				10.1

Copyright © 2025 Hunter Industries Inc. Hunter, the Hunter logo, and other marks are trademarks of Hunter Industries Inc., registered in the U.S. and certain other countries.

<https://api.hunterirrigation.com/irrigation-product/valves/ibv121625>